

CPREG®-1 ELECTROMAGNETIC HANDLES

2500 mm

- Patented
- Come mounted and pre-wired
- Easy, quick and secure fitting (without visible screws)
- Aluminium end caps
- Customizable in all RAL colors

PRODUCT FEATURES

	12-24V DC		960-480 mA
	24V DC-1 A		42
	-10 +60 °C		2 x 300*

*Maximal theoretical holding forces, for an implementation meeting the optimum laying conditions




Adjustable armature plate in case of door sagging





PV N° 13/8408/RG1 - LCPP

Item Code	Description	Weight in kg	Custom code
CPREG-1/2500AS	Electromagnetic handle CPREG-1 2500 mm 2 x 300 DaN 12-24V DC + contact natural anodizing	13	83014019
CPREG-1/2500B	Electromagnetic handle CPREG-1 2500 mm 2 x 300 DaN 12/24V DC + contact mill finish	13	83014019

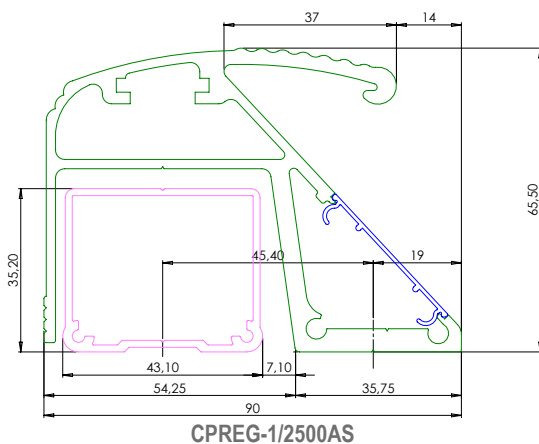

CPREG-1/2500AS

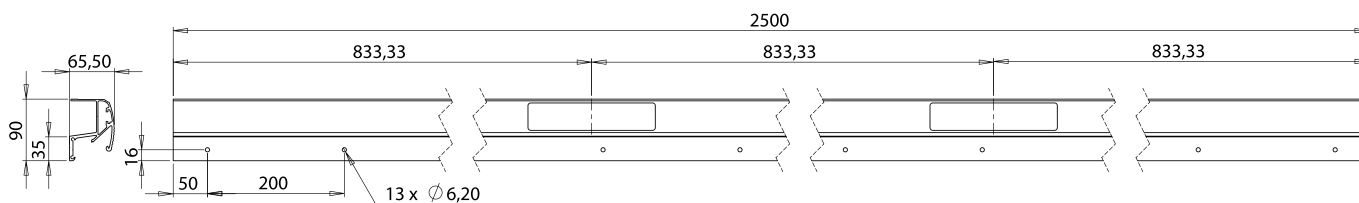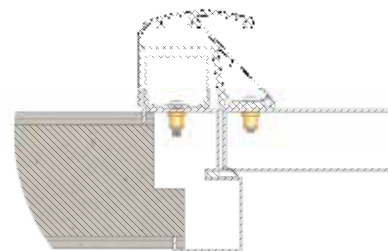

CPREG-1/2500AS



CPREG®-1 ELECTROMAGNETIC HANDLES - 2500 MM