












MS901


 MS901				
<p>/AW2 2 fils - wires -adrig - draden</p> <p>/CW2 3 fils - wires -adrig - draden</p> <p>/ALW2 4 fils - wires -adrig - draden</p> <p>/CLW2 5 fils - wires -adrig - draden</p>	<p>16 x 42 x 10</p>	<p>NO / SCHLIEßER</p> <p>INVERSEUR/CHANGEOVER WECHSLER/WISSELCONTACT</p> <p>NO / SCHLIEßER + AUTOPROTECTION / LOOP /SELBSTÜBERWACHUNG /AUTO-BESCHERMING</p> <p>INVERSEUR/CHANGEOVER WECHSLER/WISSELCONTACT + AUTOPROTECTION / LOOP /SELBSTÜBERWACHUNG /AUTO-BESCHERMING</p>	<p>200V DC / 500 mA</p> <p>100V DC / 250 mA</p> <p>200V DC / 500 mA</p> <p>100V DC / 250 mA</p>	<p>0,07 kg</p> <p>0,08 kg</p> <p>0,09 kg</p> <p>0,1 kg</p>
<p>DISTANCE DE REACTION SWITCHING DISTANCE ANSPRECHABSTAND ANTWOORD AFSTAND</p> <p style="text-align: center; font-size: 1.2em;">25 mm</p>			<p>LONGUEUR CABLE CABLE LENGTH KABELLÄNGE KABEL LENGTE</p> <p style="text-align: center; font-size: 1.2em;">2 m</p>	
<p> 68</p>		<p> -20 +70° C</p>		



MS901

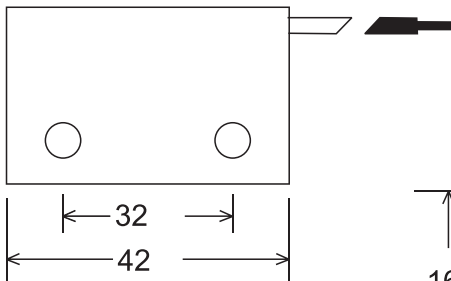
MS901/AW2

Contact 2 fils / 2 wires / 2-adrig / 2 draden

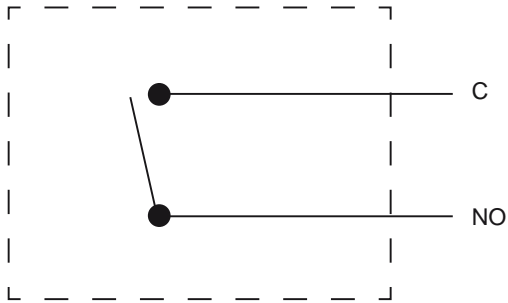


MS901/CW2

Contact 3 fils / 3 wires / 3-adrig / 3 draden

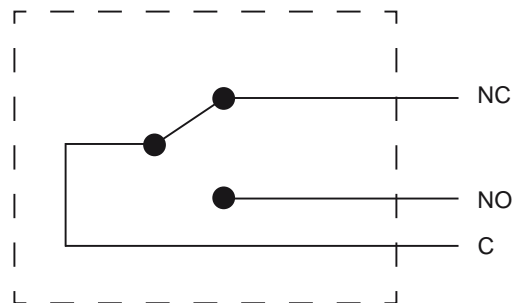


MS901/ALW2

Contact 4 fils / 4 wires / 4-adrig / 4 draden

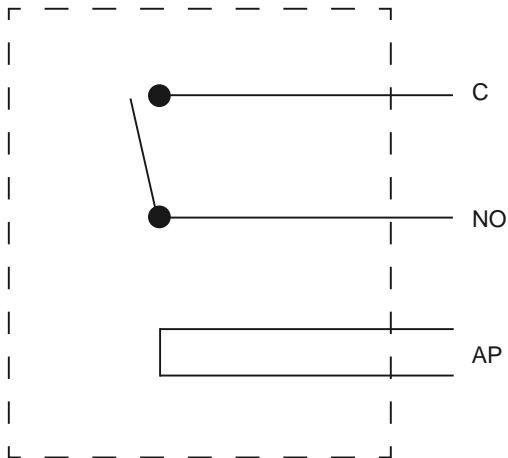

MS901/CLW2

Contact 5 fils / 5 wires / 5-adrig / 5 draden

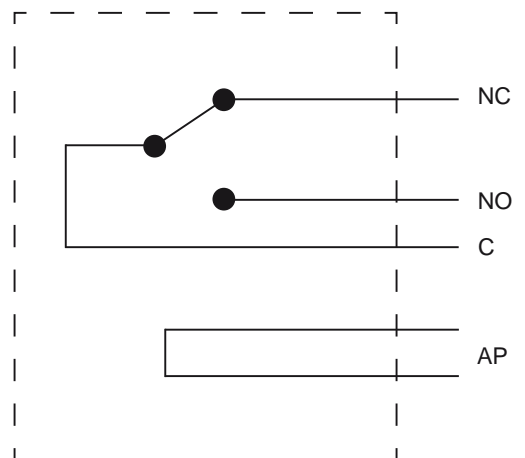

COULEUR DES FILS :
Veuillez vous reporter aux indications figurant sur l'emballage du produit.

COLOUR OF THE WIRES :
Please refer to information labelled on the product's package.

KABEL FARBEN:
Bitte Kabel Farben auf der Produkt Verpackung entnehmen.

KLEUR VAN DE KABELS :
Gelieve u uit te stellen tot de aanwijzingen die op de verpakking van het product voorkomen.