


GACHE ELECTRIQUE ROUREG™ MINI
 ELECTRIC STRIKE ROUREG™ MINI
 ROUREG™ ELEKTRO-TÜRÖFFNER MINI
 ROUREG™ DEUROPENER MINI

SEM1LR

ST_SEM1LR_A_091201

● de série / standard execution / Standardausführung / standard uitvoering
 — non disponible / not available / nicht verfügbar / niet beschikbaar

	h x l x p H x L x D H x B x T H x B x D		0,1 kg		300° C		350 DaN		
61,8 x 15,8 x 25,5 mm									
A EMISSION - FAIL SECURE ARBEITSSTROM - ARBEIDSSTROOM									
1 ROUREG MINI RED ROT ROOD									
MODELE MODEL MODELL									
SEM1LR	—	●		1	1	10,2 - 13,8 V DC	200 mA		
				1	1	12 - 24 V AC	200 - 400 mA		
				2	2	20,4 - 27,6 V DC	100 mA		
				2	2	24 - 48 V AC	100 - 200 mA		
DEVERROUILLAGE IMMEDIAT SOUS PRESSION JUSQU'A : IMMEDIATE UNLOCKING UNDER LOAD UP TO : TÜRÖFFNUNG BEI EINER LAST VON BIS ZU: ONTGRENDELING ONDER DRUK VAN :									
						DC = 3 DaN	AC = 12 DaN		

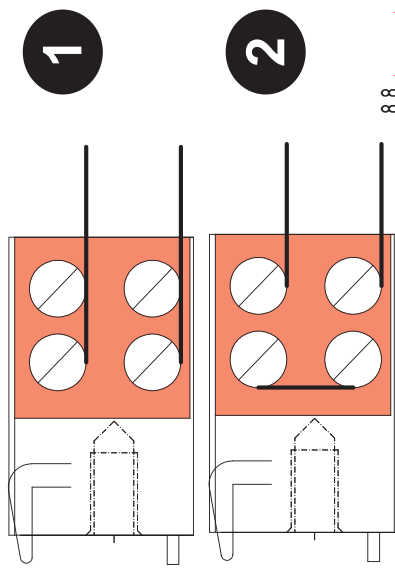

RACCORDEMENT
 CONNECTING
 ANSCHLUßPLAN
 AANSLUITING

